



## 40YY SERIES


Advanced Purification System

4011, 4014, 4035, & 4037 Purifier Models

## 40ZZ SERIES

Advanced Purification System


4022, 4028, 4044, & 4050 Purifier Models

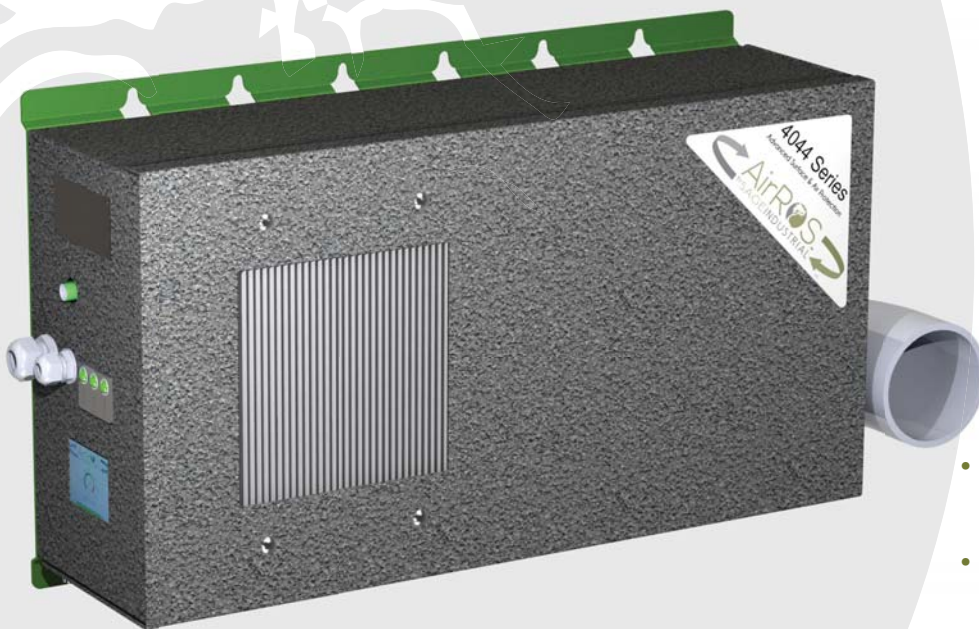

- Plug and play installation and activation
- Ultra-Low Energy efficiency <1.25Amps (150w 120V 1PH)
- Touch screen controller
- Dynamic monitoring control with internal/external controller and sensor
- Easy maintenance
- Logging available for reporting
- Portable Option

How it Works:

**Existing Air  
(Containing Microorganisms)**

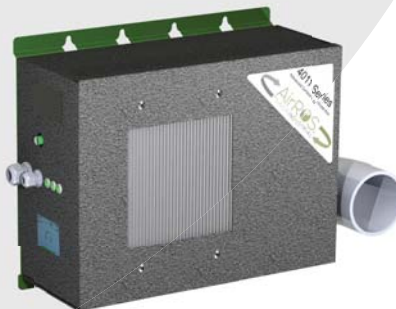

**ROS  
(Reactive Oxygen Species)**

The sanitized air that comes out of the purifier enters the environment and continues to sanitize ALL surfaces it contacts.

AirROS purifiers utilize electricity and create ROS. The highly-reactive ROS inside the purifier DESTROYS Molds, Pathogens, Viruses, and Odors as they pass through the chamber.

# 40YY & 40ZZ Series Surface & Air Purifiers will sanitize indoor air & surfaces in rooms 1,100-50,000 cubic feet using less than 1.25Amps (150 watts)

## ► Model Number

4011	11,000 ft <sup>3</sup> *	4022	22,000 ft <sup>3</sup> *
4014	14,000 ft <sup>3</sup> *	4028	28,000 ft <sup>3</sup> *
4035	35,000 ft <sup>3</sup> *	4044	44,000 ft <sup>3</sup> *
4037	37,000 ft <sup>3</sup> *	4050	50,000 ft <sup>3</sup> *
C	Controller - Touch Screen Controller		
S	Sensor - Ozone †		
P	Portable - Handle/feet		
I	Internal Controller option		
T	Transparent Controller Lid w/ SS Latch		
R	Remote Sensor option		

† Internal or External sensor required for dynamic control

\* Actual Capacity depends on Oxygen level, Temp, and Commodity factors

## ► Benefits:


- Destroys Mold, Bacteria, Yeast, Pathogens, & Viruses
- Eliminates/neutralizes Odor
- Organic no-chemicals added
- Reduces cross-contamination
- Ultra-low power consumption

### Example Configurations:

4037CS  
4037C-P  
4044/4000CSI  
4050/4000CIT/4000S

Standard Wall mount

4inch (4.5"OD) PVC Sch40 Output

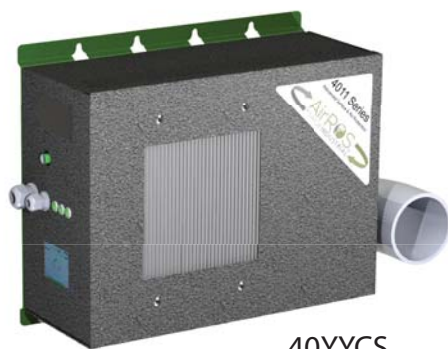

40YYCS



40ZZCS



4000CSI  
4000S



4000CITR

## 40YY SERIES

Model	Capacity ft <sup>3</sup>	Dimensions	Amps	Watts
4011	11,000	24w x 17h x 9d	0.70	84.0
4014	14,000	24w x 17h x 9d	0.68	81.6
4035	35,000	24w x 17h x 9d	1.10	132
4037	37,000	24w x 17h x 9d	1.09	131
4022	22,000	34w x 17h x 9d	0.80	96.0
4028	28,000	34w x 17h x 9d	0.76	91.2
4044	44,000	34w x 17h x 9d	1.20	144
4050	50,000	34w x 17h x 9d	1.17	141
-C			+0.02	+2.4
-S			+0.03	+3.6

## 40ZZ SERIES

## 4000C SERIES

Model	Description	Dimensions	Additional Amps	Additional Watts
4000CI(TR)	Touch Controller	6w x 6h x 4d	0.02	2.4
4000S	Sensor	6w x 6h x 4d	0.03	3.6



PROUDLY MADE IN THE USA



1865 Herndon Ave. Ste. K126 | Clovis, CA 93611  
T 855.201.SAGE | [www.SAGEINDUSTRIAL.com](http://www.SAGEINDUSTRIAL.com)